


LETI 300 RECESSED LAMP

Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient **GX53 LED lamps 2x 3W-700lm included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada LED per incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con incluse **2 lampadine a LED GX53 2x 3W-700lm** approvate TÜV, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



5C4.000.G2L

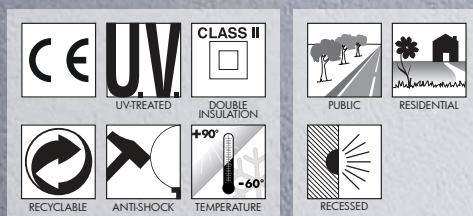

LETI 300 - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

HOUSING made of shockproof resin material, suitable for the electrical devices fixation. Provided with **2x GX53 3W led lamps** or with E27 lampholders and with silicone rubber gasket to ensure high protection against external agents.

CASSA realizzata in resina antiurto, adatta ad alloggiare gli accessori elettrici. Fornita completa di 2 lampadine led 3W GX53 o di portalampada E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 300



Dimensions and weight

Height: 113 mm
Width: 293 mm
Installation housing depth: 98 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED



Recessed lamp supplied complete with TÜV approved, long-life and efficient **GX53 LED lamps 2x 3W-700lm included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.



2x 3W
6W

700 Lm

4000 K .G2L
3000 K .G2R

2x 3W
700 Lm

= 60W
incandescent

SAVE 92%

E27

*ADD SUFFIX



Recessed lamp supplied complete with E27 lampholder.

E27
(CFL -LED)

max 160 mm

.E27


LED LAMPS




More technical details about TÜV approved Fumagalli LED Lamps on page 468.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 300
RECESSED LAMP

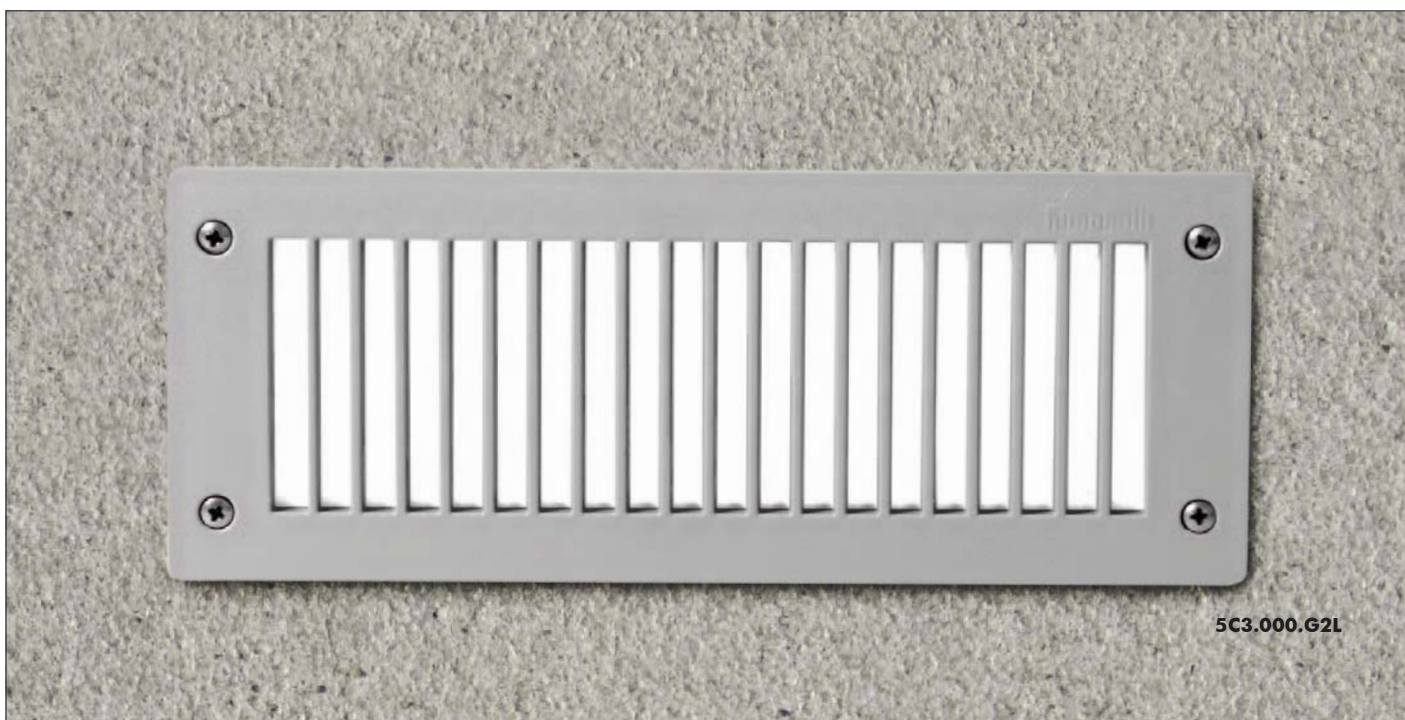

MADE IN ITALY

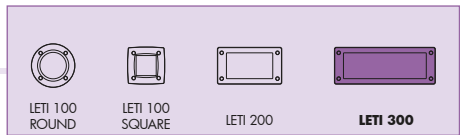

LETI 300

5C1.000.G2L **6W** 5C1.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-GL

5C2.000.G2L **6W** 5C2.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-RS

5C3.000.G2L **6W** 5C3.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-HS

5C4.000.G2L **6W** 5C4.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

LETI 300-VP

5C5.000.G2L **6W** 5C5.000.G2R

4000K 2 GX53 LED LAMPS INCLUDED 3000K

Pcs 24
Kg 28
mc 0,12

BULKHEAD
FLOODLIGHT
IN-GROUND
BRICKLIGHT
BOLLARDS
GARDEN
URBAN CLASSIC
URBAN MODERN
HIGH-BAY
POST
LAMPS