


SAURO LED

CLASSIC BOLLARD


Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV approved, long-life and efficient **GX53 LED lamp included** available in different wattages. Uniform light distribution for a safer and more enjoyable night atmosphere. Insulation class II, protection rating IP55.

Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 approvata TÜV, di lunga durata ed elevata efficienza, disponibile in diverse potenze. Uniforme distribuzione della luce per un'atmosfera notturna sicura e gradevole. Classe di isolamento II, grado di protezione IP55.

D15.555.D1LCRB

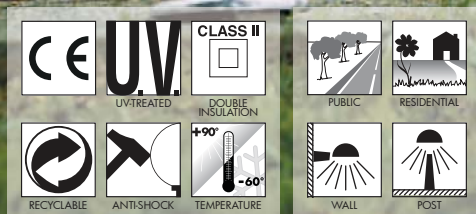

BULKHEAD
FLOODLIGHT
IN-GROUND
BRICKLIGHT
BOLLARDS
GARDEN
URBAN CLASSIC
URBAN MODERN
HIGH-BAY
POST
LAMPS



SAURO LED



SAURO E27

SAURO LED COMPONENTS

IP55



CAP made of shockproof resin material, locked to the diffuser and equipped with GX53 led lamp. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA fissata al diffusore, realizzata in resina antiurto e completa di lampadina led GX53. Rimovibile tramite vite di sicurezza per permettere il cambio della lampadina.

DISK made of UV-rays stabilized PMMA to spread the light and to get a lower dazzle.

DISCO in polimetilmetacrilato (PMMA) per diffondere la luce e ridurre l'abbagliamento.

DIFFUSER of UV stabilized polymethylmethacrylate (PMMA) available in clear or opal colour.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.

CONE reflector. Available in white resin (standard version) or chromed aluminium (optional).

CONO riflettente. Disponibile nella versione in resina bianca (standard) o in alluminio cromato (optional).



CONNECTION RING made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GHIERA di raccordo realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SAURO LED



Dimensions

Height: 500/800/1100 mm

Moulded colours:

- Black
- White
- Grey

Painted colours:

- Antique green
- Antique bronze

Diffuser PMMA:

- Clear
- Opal

GX53 LED

*ADD. SUFFIX



7 W	800 Lm	4000 K	.C1L
		3000 K	.C1R
10 W	1200 Lm	4000 K	.D1L
		3000 K	.D1R

Bollard supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GU10 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.



LED LAMPS



More technical details about TÜV approved Fumagalli LED Lamps on page 468.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PHOTOMETRIC DATA SAMPLE

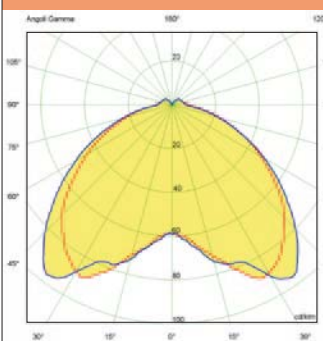

GX53 LED 10W
(power consumption)

Area: 6x6mt
Height: 1,1mt
23 lux

SAVE -88%



SON 70W 84W
(power consumption)

Area: 6x6mt
Height: 1,1mt
23 lux


E27 VERSION

SAURO LED
CLASSIC BOLLARD

BULKHEAD
FLOODLIGHT
IN-GROUND
BRICKLIGHT
BOLLARDS
GARDEN
URBAN CLASSIC
URBAN MODERN
HIGH-BAY
POST
LAMPS



MADE IN
ITALY



SAURO LED



SAURO E27

SAURO 1100 LED

D15.555.C1LCRB	7W	D15.555.C1RCRB
D15.555.D1LCRB	10W	D15.555.D1RCRB

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 1
Kg 4,5
mc 0,068

SAURO 800 LED

D15.554.C1LCRB	7W	D15.554.C1RCRB
D15.554.D1LCRB	10W	D15.554.D1RCRB

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 1
Kg 3,6
mc 0,05

MIRELLA LED

D15.505.C1LCRB	7W	D15.505.C1RCRB
D15.505.D1LCRB	10W	D15.505.D1RCRB

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 1
Kg 2,2
mc 0,032

SAURO 500 LED

D15.553.C1LCRB	7W	D15.553.C1RCRB
D15.553.D1LCRB	10W	D15.553.D1RCRB

4000K GX53 LED LAMP INCLUDED 3000K

Pcs 1
Kg 3,2
mc 0,032

*To order the aluminium chrome cone version use the CMS (instead of CRB) suffix at the end of the code