

GLOBE 300 CLASSIC



MEDIUM SIZE

Ø 300 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV approved, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di **lampadine LED a filamento** adatte ad uso in ambiente esterno, approvate TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

G30.111

G30.162



BULKHEAD
FLOODLIGHT
IN-GROUND
BRICKLIGHT
BOLLARDS
GARDEN
URBAN CLASSIC
URBAN MODERN
HIGH-BAY
POST
LAMPS


GLOBE 300 CLASSIC - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

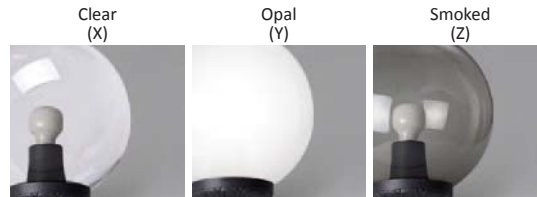

GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.

GLOBE 300 CLASSIC

G30.B30 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,4 Kg

Moulded colours:

 Black  White

Painted colours:


 Antique green  Antique bronze

Diffuser PMMA:

 Clear  Opal  Smoked

E27 VERSIONS



E27 (GLS-CFL-LED)	max 75W max 190 mm	*ADD SUFFIX .E27
 6 W	800 Lm	2700 K .F1R
8 W	1000 Lm	2700 K .M1R
12 W	1500 Lm	2700 K .N1R


**6W
8W
12W** = **60W
75W
100W** incandescent


SAVE 90%

Globe supplied with E27 base. Provided as an option with TÜV approved, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.



LED LAMPS



More technical details about TÜV approved Fumagalli LED Lamps on page 468.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PHOTOMETRIC DATA SAMPLE

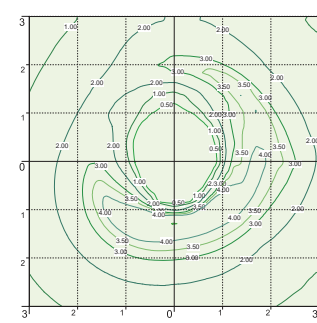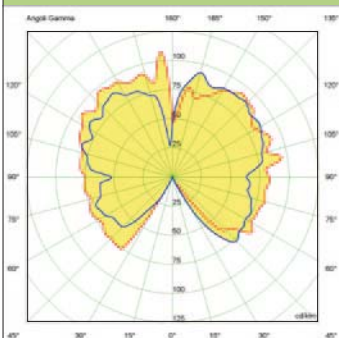

GLOBE 300 CLASSIC clear with Fumagalli Filament Led Lamp 6W.

POST height 2mt
6x6mt area: average 2,5 lux

The photometric data for all the versions are available upon request or on our website.

GLOBE 300 CLASSIC
MEDIUM SIZE

BULKHEAD

FLOODLIGHT

IN-GROUND

BRICKLIGHT

BOLLARDS

GARDEN

URBAN CLASSIC

URBAN MODERN

HIGH-BAY


POST

LAMPS




RICU BISSO/G300 2L
G30.157.S20

Pcs 1
Kg 24,4
mc 0,237




RICU BISSO/G300 3L
G30.157.S30

Pcs 1
Kg 24,4
mc 0,237




BISSO/G300
G30.131

Pcs 4
Kg 6
mc 0,120




SICHEM/G300
G30.120

Pcs 4
Kg 6
mc 0,120




GLOBE 300 CLASSIC
G30.B30

Pcs 2
Kg 2,8
mc 0,059




RICU OFIR/G300 2L
G30.157.R20

Pcs 2
Kg 30,2
mc 0,379




RICU OFIR/G300 3L
G30.157.R30

Pcs 2
Kg 34
mc 0,439




OFIR/G300
G30.132

Pcs 4
Kg 6
mc 0,120




MINILOT/G300
G30.111

Pcs 4
Kg 8
mc 0,143




RICU/G300
G30.157

Pcs 2
Kg 21,5
mc 0,274

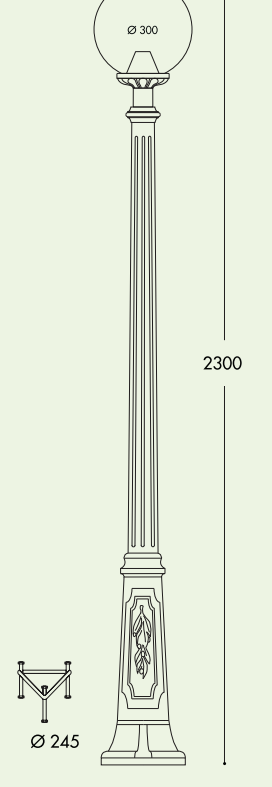


GIGI/G300
G30.156

Pcs 2
Kg 20,4
mc 0,242

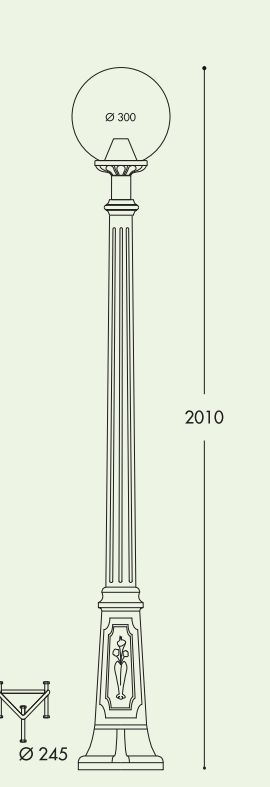


ARTU'/G300
G30.158

Pcs 2
Kg 16,8
mc 0,211

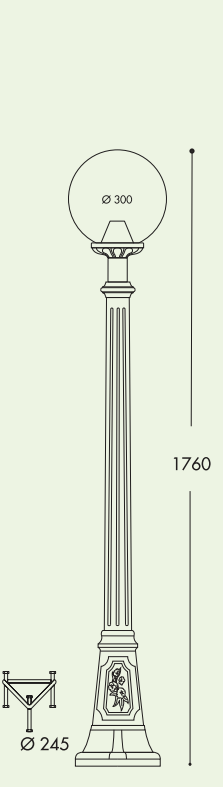


ALOE'.R/G300
G30.163

Pcs 2
Kg 7,4
mc 0,146

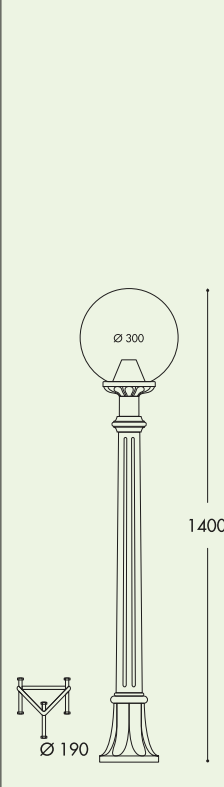


MIRRA/G300
G30.142

Pcs 2
Kg 8,6
mc 0,143



IAFET.R/G300
G30.162 resin


Pcs 2
Kg 7,3
mc 0,117



GLOBE 300 CLASSIC

MEDIUM SIZE

BULKHEAD
FLOODLIGHT
IN-GROUND
BRICKLIGHT
BOLLARDS
GARDEN
URBAN CLASSIC
URBAN MODERN
HIGH-BAY
POST
LAMPS

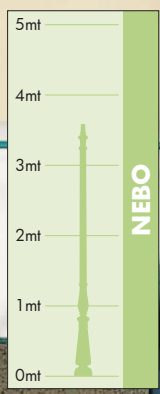

Pag. 456



MADE IN ITALY



NEBO/G300
G30.201

Pcs 1
Kg 19
mc 0,163

Ø 300

2800

Ø 275

NEBO OFIR/G300 2L
G30.201.R20

Pcs 1
Kg 22,9
mc 0,208

820

Ø 300

2900

Ø 275

2

NEBO OFIR/G300 3L
G30.201.R30

Pcs 1
Kg 24,4
mc 0,237

860

Ø 300

2900

Ø 275

3